Version No. 5 Page 1 of 4	Technical Definition
ptp.	Technical Definition
Kit 10-8 2023 - PTP	Layer Thickness measurement – Aluminium painted
Metallic	panels

Please comply with the HSE policy of your laboratory for each test performed.

Instructions to participant laboratories

Please read these instructions carefully BEFORE starting the tests.

- 1. 3 specimens (80 x 50 x 1 mm) are supplied to each participant.
 - Pl1 specimen without any coatings or treatments, a protective film should be removed before to test.
 - Pl2 specimen with Unsealed CAA + Primer
 - > PI3 specimen with Unsealed CAA + Primer + Top coat
- 2. Each participant is required to determine the thicknesses of layers for each specimen as indicated below:

Eddy currents method

The thickness of the coating shall be measured in accordance with **ISO 2808:2019** and **ISO 2360:2017**. The baseline shall be performed on untreated specimen (Pl1) and at least 3 measurements shall be made on each layer on the opposite of the marked face. Thus, the primer and top coat thickness will be determined (Pl2 & Pl3).


<u>Microscopic method</u> – only for Test Specimen Pl3 (not mandatory if you are not qualified by your sponsor for using this measurement method)

A cross section shall be performed on the test specimens lengthways (after measurement by eddy currents method) in order to measure the thickness of each layer. The measurements shall be performed in accordance with **ISO 1463 (2021)**. For each layer, at least 10 measurements shall be done, uniformly distributed along side opposite of the marked face of the test specimens and covering the 80mm length of the cross section.

Version No. 5	Page 2 of 4	Technical Definition	
ptp.		rechnical Definition	
PL	P.		
Kit 10-8 2023 - PTP		Layer Thickness measurement – Aluminium painted	
Met	allic	panels	


Description of test specimens

Test Specimen Pl1 (Identification 10-8-Pl1-XXX).

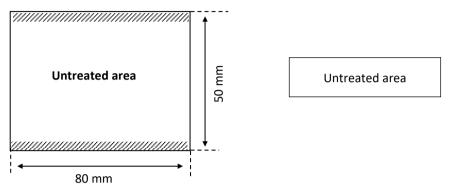



On Pl1 specimen, a protective film should be removed before to test.

Test Specimen PI2 (Identification 10-8-PI2-XXX)

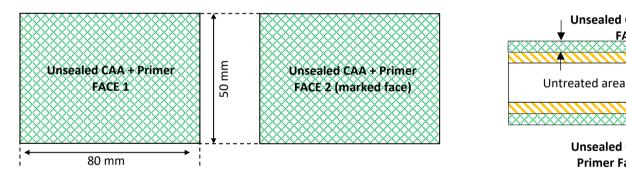

Test Specimen PI3 (Identification 10-8-PI3-XXX)

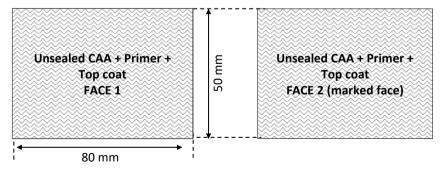



Unsealed CAA + Primer FACE 1

Unsealed CAA +

Primer Face 2

Unsealed CAA+ Primer + Top coat FACE 2

The tests shall be performed respecting the following conditions:

- One operator only
- One testing machine only
- Tests performed in sequence

Version No. 5 Page 3 of 4		
p	tp.	
Kit 10-8 2	2023 - PTP	
Met	tallic	

Technical Definition

Layer Thickness measurement – Aluminium painted panels

3. Results for both methods are to be reported as follows:

Characteristic	Unit	Significant digits	Mandatory / Not mandatory	Evaluated Yes/no
Unsealed CAA average thickness (Microscopic method) – <u>to be measured</u> <u>on face 1 of PI3</u>	μm	X,X	Mandatory only for microscopic method	Yes
Unsealed CAA + Primer average thickness (Eddy current method) - <u>to be measured</u> <u>on face 1 of Pl2</u>	μm	XX,X	At least one method has to be	Yes
Primer average thickness (Microscopic method) – <u>to be measured face 1 on PI3</u>	μm	XX,X	used	Yes
Unsealed CAA + Primer + Top coat average thickness (Eddy current method) – <u>to be measured on face 1 of PI3</u>	μm	XX,X	At least one method has to be	Yes
Top coat average thickness (Microscopic method) – <u>to be measured on face 1 of</u> <u>PI3</u>	μm	XX,X	used	Yes
For microscopic method, pictures of the sample with measurements	N/A	N/A	Mandatory	No

All evaluated characteristics will be analysed according to the algorithm A (ISO 13528 – 2015) and evaluated using z-score.

4. Testing shall start **as soon as test specimens are received**. Please contact the following e-mail address for any technical or administrative query.

Submission date	August 15 th , 2023	
Technical and administrative support	info@ptpscheme.com	

- 5. Instructions for submission of results are detailed on the website: <u>https://ptpscheme.com</u>
- 6. To ensure the confidential treatment of your results in the final report, you will be allocated a unique identity number when you register for the program.
- 7. Collusion and falsification of your PTP results are totally forbidden. In case of identification or suspicion of collusion or falsification, the laboratory will be excluded from the program and the sponsors will be immediately informed. The sponsors could ask you for proof of your results, so be sure to conserve data, curves and specimens.
- 8. The tested specimens do not need to be sent back to the PTP office.

Version No. 5 Pag	ge 4 of 4	Technical Definition
ptp.		Technical Definition
Kit 10-8 2023 Metallic		Layer Thickness measurement – Aluminium painted panels

APPENDIX : Instructions for IRR participation

The Internal Round Robin participation (IRR) is **optional** and **independent** from your PTP participation. <u>Confidentiality</u>: The IRR results and reports are confidential and only accessible by your laboratory. They are not shared with the scheme sponsors or any other accreditation or certification bodies.

The extra samples shall be tested according to the following table:

	Operator 1	Operator 2	Operator 3	Operator 4	Operator X
Test machine 1	PTP kit (3 samples)	3 samples	3 samples	3 samples	3 samples
Test machine 2	3 samples				
Test machine 3	3 samples				
Test machine Y	3 samples				

Operator 1 (OP1) is to be the most experienced operator currently conducting tests on a regular basis and shall perform tests on all machines (TM1, TM2, TM3...)

Test Machine 1 (TM 1) is to be the most utilised machine for this test in your laboratory and shall be tested by all operators (OP1, OP2, OP3...)

Example: A laboratory has 2 operators and 3 test machines. They receive a PTP kit and 9 extra specimens.

Operator 1 shall test the PTP kit on TM1, 3 specimens on TM2 and 3 specimens on TM3. Operator 2 shall test 3 specimens on TM1.

The IRR results have to be submitted on a separate result form available on the PTP website. The identification of operators and test machines you provide will appear on the IRR final report. These identifications will not be seen by other laboratories.

The IRR results will be classified against the acceptance classes of the kit 10-8-2023.

<u>Reminder:</u> Laboratories are not permitted to switch specimens between the PTP kit and IRR samples. The traceability of the samples will be checked during the evaluation. Laboratories found to have switched samples will invalidate their PTP participation.

Version Date	Version N°	Changes
04/01/2023	1	Document creation
31/01/2023	2	IRR appendix table: number of samples corrected
07/04/2023	3	Measurements to be performed on face 1 of each specimen (opposite of marked face)
23/05/2023	4	Update of results submission deadline
17/07/2023	5	Submission date update

VERSION HISTORY